

6

5


4

3

2


1

D

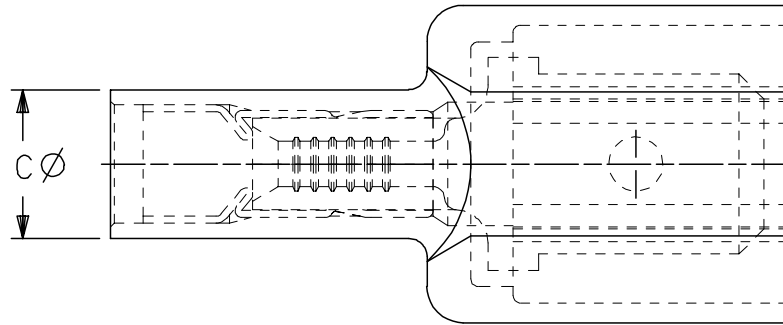


D

C

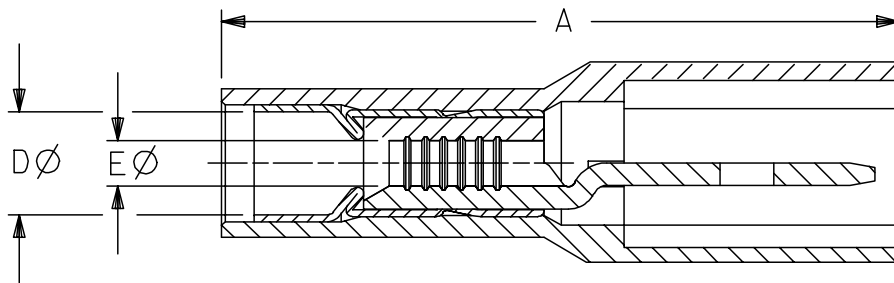

C



C

B

MATERIAL NO.	ENGINEERING NO.	WIRE SIZE	TAB SIZE	COLOR	STOCK THICKNESS	A MAX	B MAX	C MAX	D MWID	E MIN
190010001	AA-5260	22-18	.250x.032	RED	.031	.96	.45	.22	.140	.056
190010003	AA-5266	22-18	.187x.020	RED	.020	.90	.38	.22	.140	.056
190010006	BB-5262	16-14	.250x.032	BLUE	.031	.96	.45	.25	.170	.084
190010008	BB-5268	16-14	.187x.020	BLUE	.020	.90	.38	.25	.170	.115

B

(C)

A

NOTE:
MWID= MAXIMUM WIRE
INSULATION DIAMETER

A

REMOVED C-5264 EC NO: ETC2006-0090 DRWN:ASAYDEH 2005/11/22 CHKD:JLOMASTRO 2005/11/22 APPR:RDEROSS 2005/11/23	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION																
		$\blacktriangledown=0$ $\nabla=0$	<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>\pm---</td> <td>\pm---</td> </tr> <tr> <td>3 PLACES</td> <td>\pm---</td> <td>\pm.005</td> </tr> <tr> <td>2 PLACES</td> <td>\pm0.13</td> <td>\pm.01</td> </tr> <tr> <td>1 PLACE</td> <td>\pm0.25</td> <td>\pm---</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	\pm ---	\pm ---	3 PLACES	\pm ---	\pm .005	2 PLACES	\pm 0.13	\pm .01	1 PLACE	\pm 0.25	\pm ---	DRAWN BY RCM	DATE 1990/05/11	TITLE AVIKRIMP FULLY INSULATED MALE TAB			
			mm	INCH																				
		4 PLACES	\pm ---	\pm ---																				
3 PLACES	\pm ---	\pm .005																						
2 PLACES	\pm 0.13	\pm .01																						
1 PLACE	\pm 0.25	\pm ---																						
		CHECKED BY RDEROSS	DATE 05/11/04																					
				APPROVED BY RDEROSS	DATE 05/11/04	MATERIAL NO. SEE CHART																		
						DOCUMENT NO. SD-19001-003		SHEET NO. 1 OF 1																

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

SIZE
A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

5

4

3

2

1