

COMPACT POWER RELAY

1 POLE x 2 - 12A (28VDC)

(For 24V battery automotive applications)

FBR572, 582 Series

■ FEATURES

- Two independent relays mounted in a single package
- High current contact capacity
(carrying current: 40 A/2 minutes, 30 A/1 hour)
- Suitable for controlling 24 V motors in trucks and other large vehicles
- High heat resistance and extended operating voltage
- Two types of contact gap
(FBR572: 0.8 mm, FBR582: 1.4 mm)
- RoHS compliant
Please see page 8 for more information



■ PARTNUMBER INFORMATION

[Example] FBR572 N D24 - W1 - **
 (a) (b) (c) (d) (e)

(a)	Relay type	FBR572 : FBR572 Series (contact gap 0.8mm) FBR582 : FBR582 Series (contact gap 1.4mm)
(b)	Enclosure	N : Plastic sealed type
(c)	Coil rated voltage	D24 : 24 VDC Coil rating table at page 2
(d)	Contact material	W1 : Silver-tin oxide indium Y : Silver-tin oxide
(e)	Special type	To be assigned custom specification

Actual marking does not carry the type name: "FBR"
 E.g.: Ordering code: FBR572ND24-W1 Actual marking: 572ND24-W1

FBR572, 582 SERIES

■ SPECIFICATION

Item		FBR572	FBR582
Contact Data	Configuration	1 form C x 2 (SPDT x 2)	
	Material	Silver-tin oxide indium (-W1 type) Silver-tin oxide (-Y type)	
	Voltage drop	Maximum 100 mV at 2A, 12VDC	
	Contact rating	28VDC, 12A (locked motor load) 28VDC, Inrush 15A, break 2.5A (motor free load)	
	Max. carrying current	40A/2 minutes, 30A/1 hour (25 °C, 100% rated coil voltage)	
	Max. inrush current (reference)	60A	
	Max. switching voltage (reference)	28VDC	32VDC
	Max. switching current (reference)	12A	14A
	Min. switching load (reference) *	6 VDC, 1A	
Life	Mechanical	Min. 10 x 10 ⁶ operations	Min. 1 x 10 ⁶ operations
	Electrical	Min. 100 x 10 ³ operations (locked motor load) Min. 500 x 10 ³ operations (motor free load)	Min. 100 x 10 ³ operations (locked motor load)
Coil Data	Operating temperature range	-40 °C to +85 °C (no frost)	
	Storage temperature range	-40 °C to +100 °C (no frost)	
Timing Data	Operate (at nominal voltage)	Max. 10 ms	
	Release (at nominal voltage)	Max. 5 ms	
Other	Vibration resistance	10 to 55Hz double amplitude 1.5mm	
	Shock	Misoperation	100m/s ²
		Endurance	1,000m/s ²
Weight	Approximately 18 g		

* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

■ COIL RATING

Series	Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Thermal resistance (°C / W)
FBR572	D24	24	384	14.4 (at 20 °C)	67
FBR582			170	18 (at 85 °C)	56

Note: All values in the table are valid for 20°C and zero contact current, unless otherwise stated.






* Specified operate values are valid for pulse wave voltage.

FBR572, 582 SERIES

■ PRINCIPAL APPLICATIONS

Application	Normal load current	Life x 10 ³	Recommended model (Example)
Power window	10A to 12A (switching at motor locking)	100	FBR582ND24-W1
Automatic door lock	5A/2 door (switching at motor locking)	100	FBR572ND24-W1

■ CHARACTERISTIC DATA

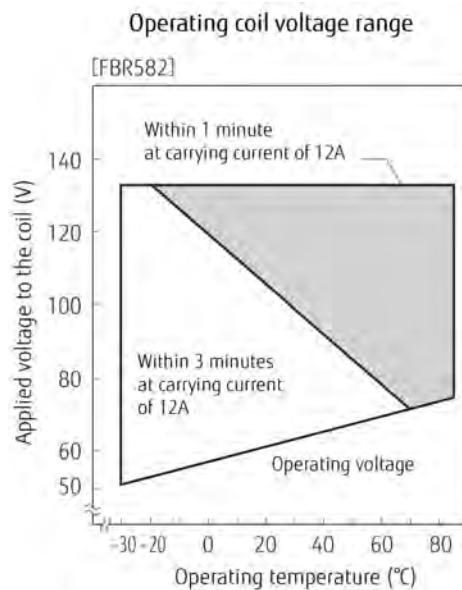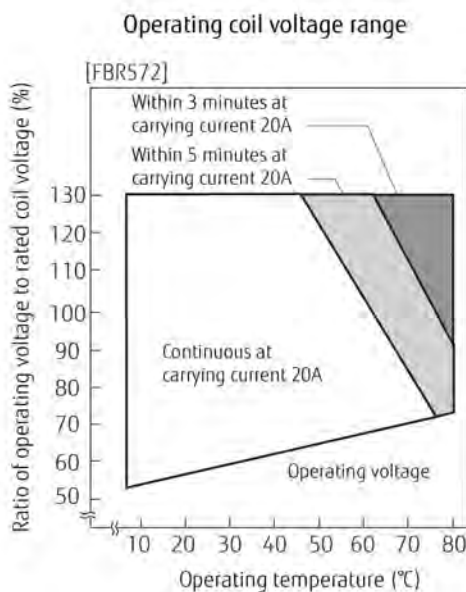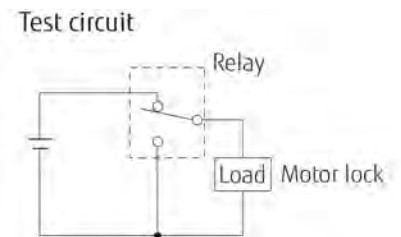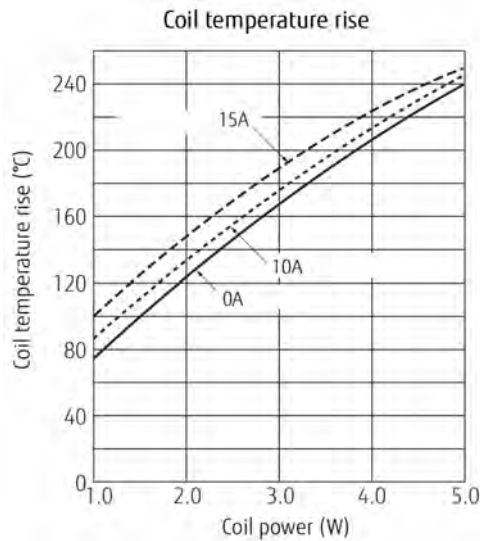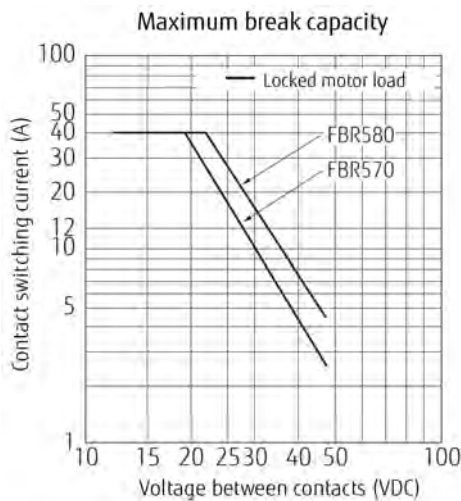

FBR572, 582 SERIES


Life test (example)

(1) Motor lock

Test item	Test circuit	Current wave form
12A, 28VDC Motor lock 100,000 operations minimum Contact material: Silver tin oxide indium		


(2) Motor free

Test item	Test circuit	Current wave form
Inrush 15A, Idle 2.5A 28VDC Motor free 500,000 operations minimum Contact material: Silver tin oxide indium		

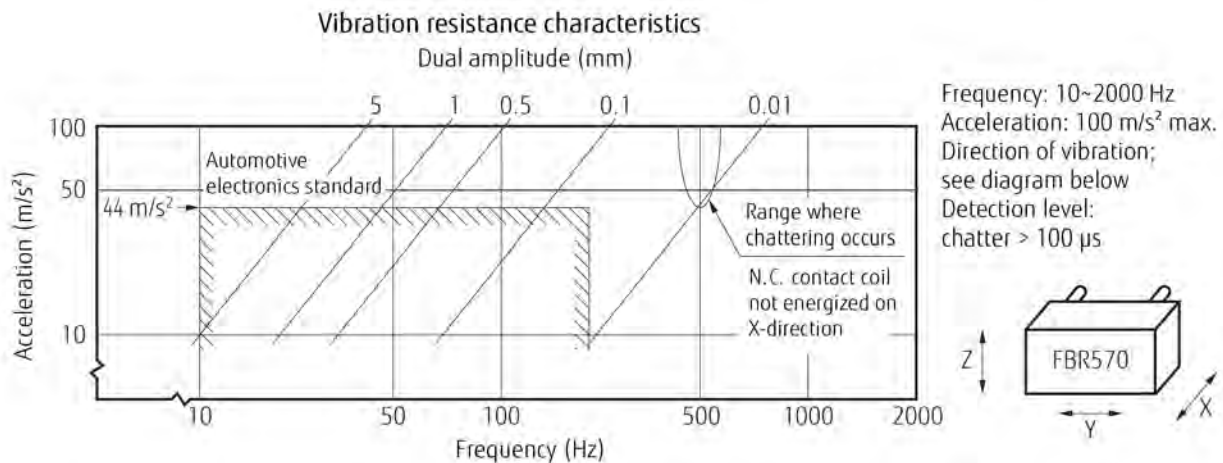


FBR572, 582 SERIES

Shock resistance characteristics

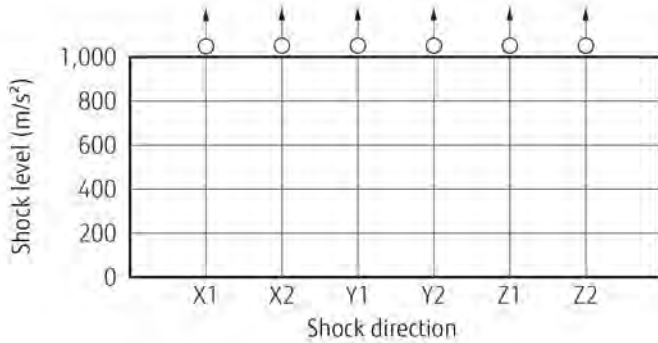


Shock application time: 11 ms, half-sine wave
 Test material: coil energized and de-energized
 Shock direction: see diagram below
 Detection level: chatter > 100 μ s




All directions $\geq 1,000$ m/s²


Distribution of operate/release voltage

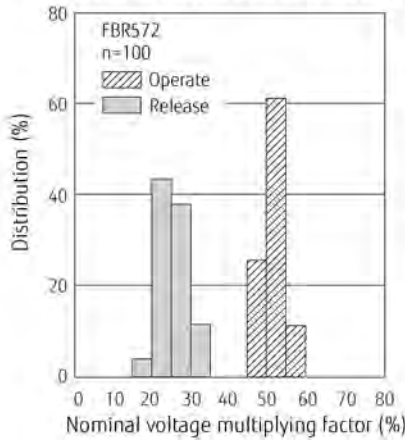


Distribution of operate/release time

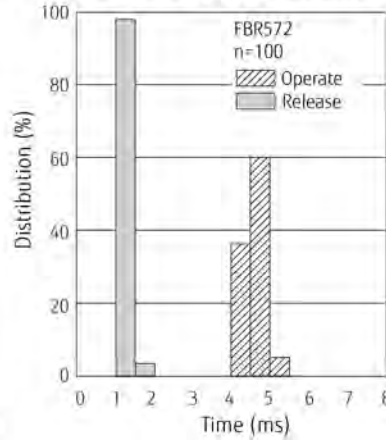


Distribution of contact resistance

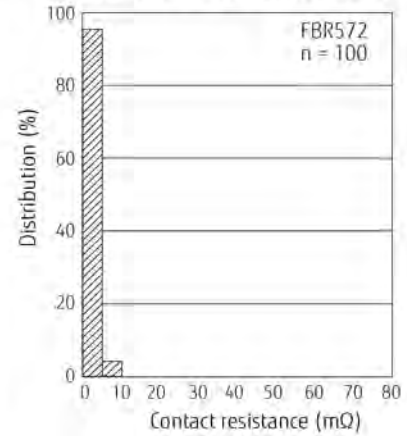


Distribution of operate/release voltage

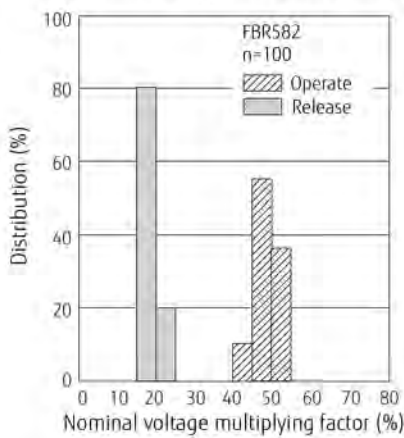

Distribution of operate/release time

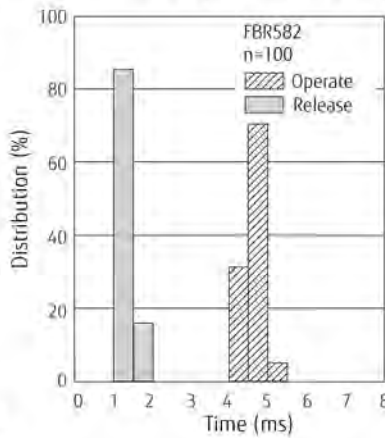

Distribution of contact resistance

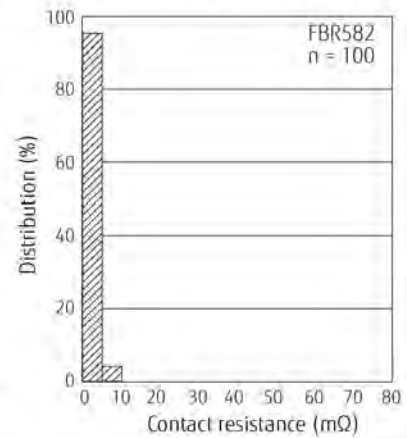


FBR572, 582 SERIES


■ DIMENSIONS

FBR572


- Dimensions

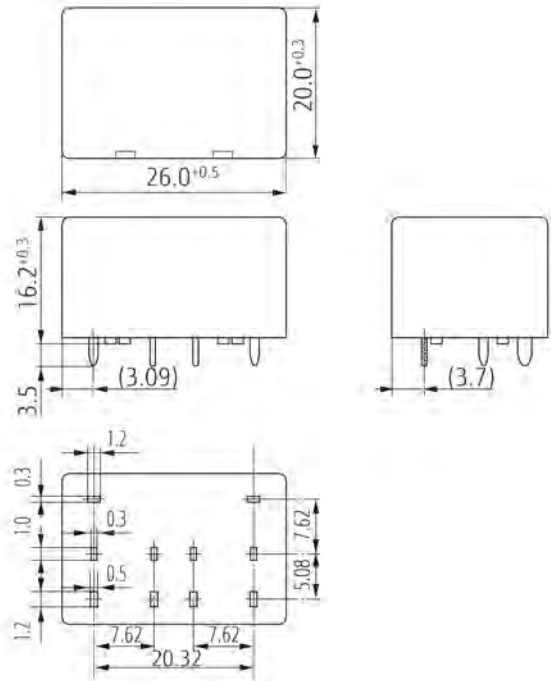

- Schematics (BOTTOM VIEW)




- PC board mounting hole layout (BOTTOM VIEW)

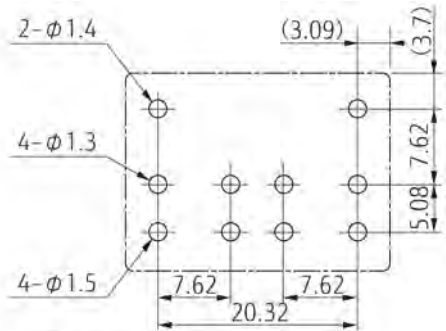

(...) dimension tolerance ± 0.1 mm

- Tube carrier

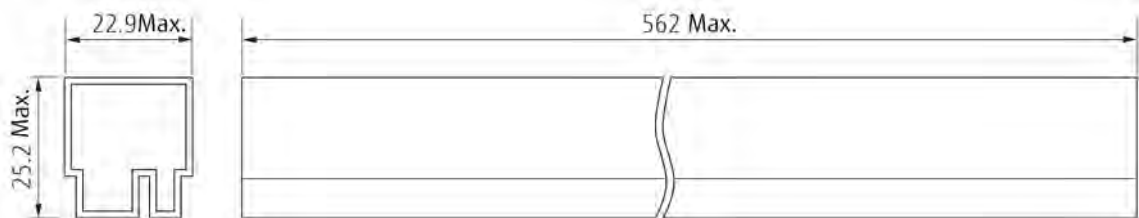


Unit: mm

FBR572, 582 SERIES


■ DIMENSIONS

FBR582


- Dimensions

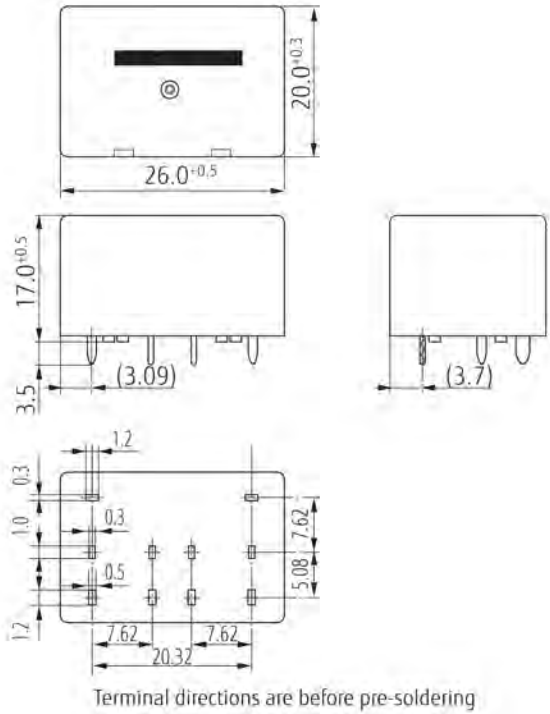


- Schematics (BOTTOM VIEW)



- PC board mounting hole layout (BOTTOM VIEW)

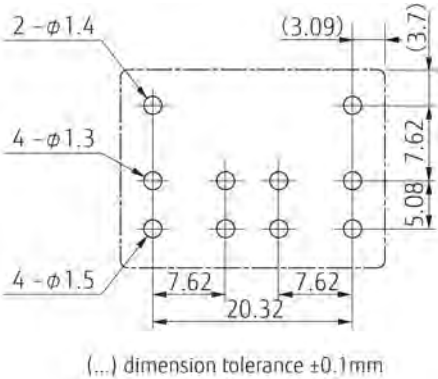

- Tube carrier

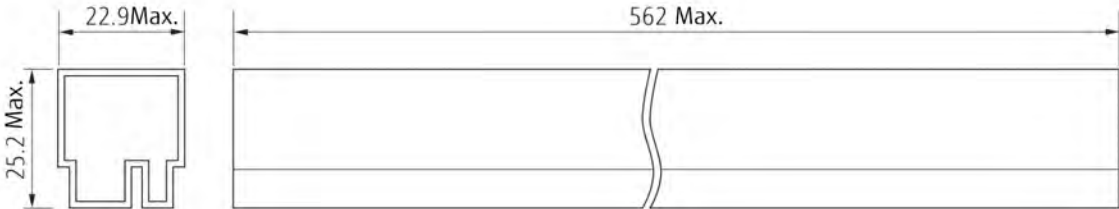

Unit: mm

RoHS Compliance and Lead Free Information

1. General Information

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives. As per Annex III of directive 2011/65/EU.
- All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: <http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Condition

- Recommended solder Sn-3.0Ag-0.5Cu.

Flow Solder condition:

Pre-heating: maximum 120° C
Soldering: dip within 5 sec. at 260° C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360° C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: [fcal@fcal.fujitsu.com](mailto:fcsl@fcal.fujitsu.com)
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2013 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. July 03, 2013