

SN75ALS125, SN75ALS127 SEVEN-CHANNEL LINE RECEIVERS

SLLS027B – D2239, APRIL 1987 – REVISED AUGUST 1989



- Meets IBM 360/370 I/O Specification
- Input Resistance . . . 7 k Ω to 20 k Ω
- Output Compatible with TTL
- IMPACT™ Low-Power Schottky Technology
- Operates from Single 5-V Supply
- High Speed . . . Low Propagation Delay
- Ratio Specification for Propagation Delay Time, Low-to-High/High-to-Low
- Glitch-Free Power-Up and Power-Down
- Seven Channels in One 16-Pin Package
- Standard V_{CC} and Ground Positioning on SN75ALS127

description

The SN75ALS125 and SN75ALS127 are monolithic seven-channel line receivers designed to satisfy the requirements of the IBM System 360/370 input/output interface specifications. Employing the IMPACT™ process allows low supply-current requirements while maintaining fast switching speeds and high-current TTL outputs.


The SN75ALS125 and SN75ALS127 are characterized for operation from 0°C to 70°C.

logic symbols†

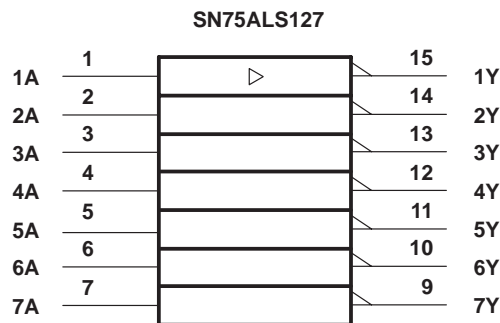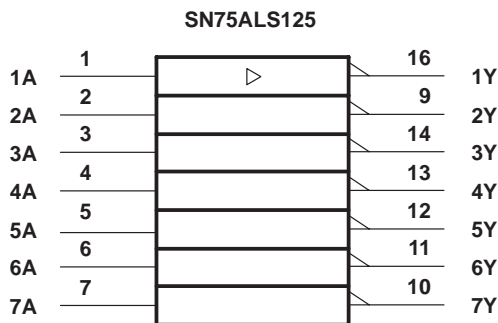


† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

SN75ALS125 . . . D, J, OR N PACKAGE
(TOP VIEW)



SN75ALS127 . . . D, J, OR N PACKAGE
(TOP VIEW)



IMPACT is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1989, Texas Instruments Incorporated
BASIC5

SN75ALS125, SN75ALS127 SEVEN-CHANNEL LINE RECEIVERS

SLLS027B – D2239, APRIL 1987 – REVISED AUGUST 1989

schematic (each receiver)

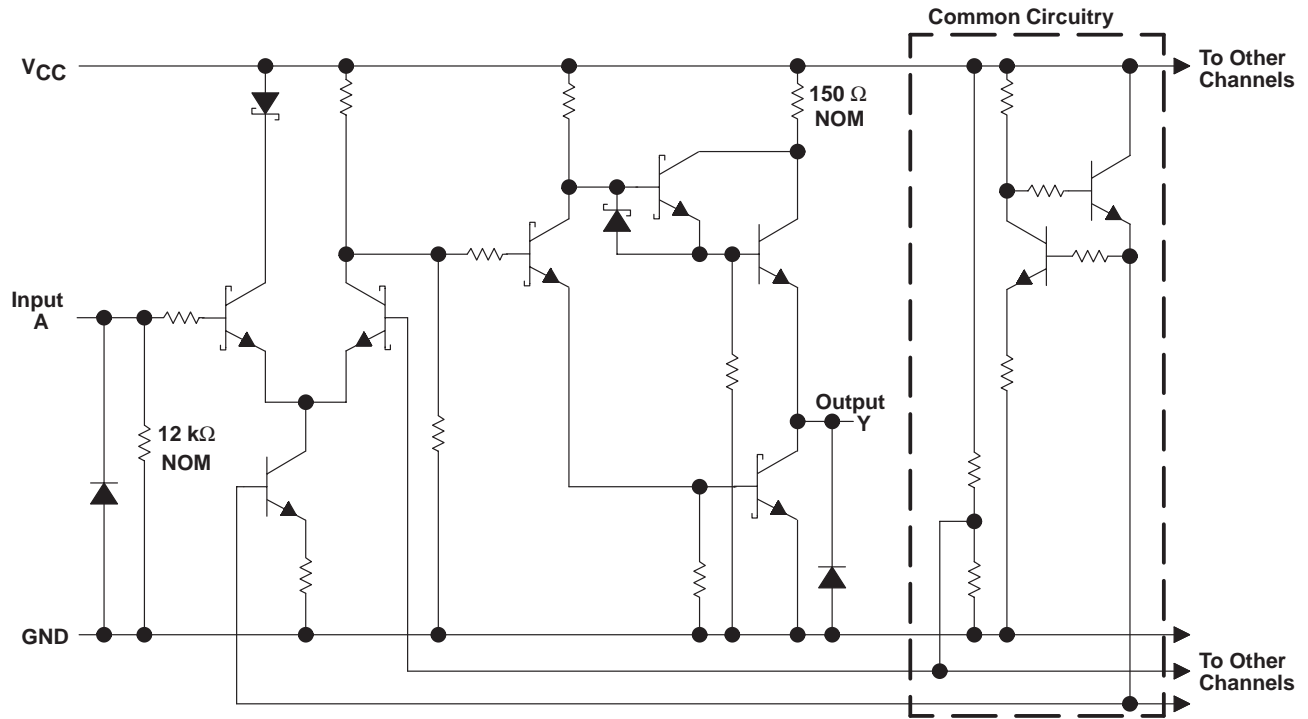

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage range	-0.15 V to 7 V
Continuous total dissipation at (or below) 25°C free-air temperature (see Note 2):	
D package	950 mW
J package	1025 mW
N package	1150 mW
Operating free-air temperature range	0°C to 70°C
Storage temperature range	-65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J package	300°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D or N package	260°C

NOTES: 1. All voltage values are with respect to network ground terminal.

2. For operation above 25°C free-air temperature, derate the D package to 608 mW at 70°C at the rate of 7.6 mW/°C, the J package to 656 mW/°C at 70°C at the rate of 8.2 mW/°C, and the N package to 736 mW at 70°C at the rate of 9.2 mW/°C.

SN75ALS125, SN75ALS127 SEVEN-CHANNEL LINE RECEIVERS

SLLS027B – D2239, APRIL 1987 – REVISED AUGUST 1989

recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V_{CC}	4.5	5	5.5	V
High-level input voltage, V_{IH}	1.7			V
Low-level input voltage, V_{IL}			0.7	V
High-level output current, I_{OH}			-0.4	V
Low-level output current, I_{OL}			16	mA
Operating free-air temperature, T_A	0		70	°C

electrical characteristics over recommended operating free-air temperature range

PARAMETER	TEST CONDITIONS	MIN	TYP†	MAX	UNIT
V_{OH} High-level output voltage	$V_{CC} = 4.5$ V, $V_{IL} = 0.7$ V, $I_{OH} = -0.4$ mA	2.4	3.1		V
V_{OL} Low-level output voltage	$V_{CC} = 4.5$ V, $V_{IH} = 1.7$ V, $I_{OL} = 16$ mA		0.4	0.5	V
I_{IH} High-level input current	$V_{CC} = 5.5$ V, $V_I = 3.11$ V		0.3	0.42	mA
I_{IL} Low-level input current	$V_{CC} = 5.5$ V, $V_I = 0.15$ V			30	μA
I_{OS} Short-circuit output current‡	$V_{CC} = 5.5$ V, $V_O = 0$	-18		-60	mA
r_i Input resistance	$V_{CC} = 4.5$ V, 0, or open, $\Delta V_I = 0.15$ V to 4.15 V	7		20	kΩ
I_{CC} Supply current	$V_{CC} = 5.5$ V, $I_{OH} = -0.4$ mA, All inputs at 0.7 V		15	25	mA
	$V_{CC} = 5.5$ V, $I_{OL} = 16$ mA, All inputs at 4 V		28	47	mA

switching characteristics over recommended operating temperature range, $V_{CC} = 5$ V

PARAMETER	TEST CONDITIONS	MIN	TYP†	MAX	UNIT
t_{PLH} Propagation delay time, low-to-high-level output	$R_L = 400$ Ω, $C_L = 50$ pF, See Figure 1	7	14	25	ns
t_{PHL} Propagation delay time, high-to-low-level output		10	18	30	ns
$\frac{t_{PLH}}{t_{PHL}}$ Ratio of propagation delay times		0.5	0.8	1.3	
t_{TLH} Transition time, low-to-high-level output		1	7	12	ns
t_{THL} Transition time, high-to-low-level output		1	3	12	ns


† All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$.

‡ Not more than one output should be shorted at a time.


SN75ALS125, SN75ALS127 SEVEN-CHANNEL LINE RECEIVERS

SLLS027B – D2239, APRIL 1987 – REVISED AUGUST 1989

PARAMETER MEASUREMENT INFORMATION

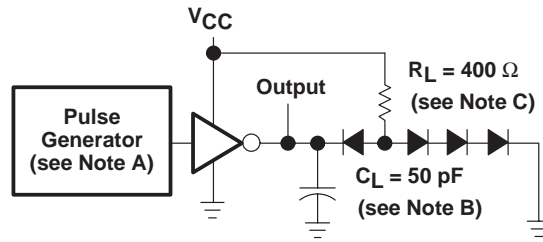

TEST CIRCUIT

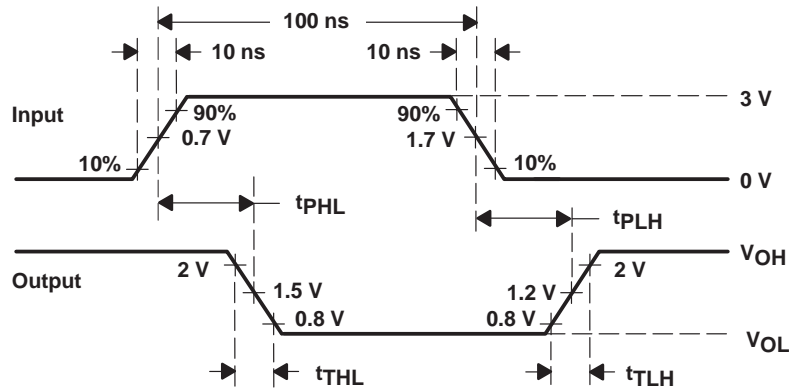

VOLTAGE WAVEFORMS

- NOTES: A. The pulse generator has the following characteristics: $Z_0 \approx 50 \Omega$, $PRR \leq 5 \text{ MHz}$.
 B. C_L includes probe and jig capacitance.
 C. All diodes are 1N3064 or equivalent.

Figure 1

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current and complete.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.