

SN54ABTH16460, SN74ABTH16460 4-TO-1 MULTIPLEXED/DEMULTIPLEXED TRANSCEIVERS WITH 3-STATE OUTPUTS

SCBS207F – OCTOBER 1992 – REVISED MAY 1997

- Members of the Texas Instruments *Widebus™* Family
- State-of-the-Art *EPIC-II B™* BiCMOS Design Significantly Reduces Power Dissipation
- Latch-Up Performance Exceeds 500 mA Per JEDEC Standard JESD-17
- Typical V_{OLP} (Output Ground Bounce) < 1 V at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$
- High-Impedance State During Power Up and Power Down
- Distributed V_{CC} and GND Pin Configuration Minimizes High-Speed Switching Noise
- Flow-Through Architecture Optimizes PCB Layout
- High-Drive Outputs ($-32\text{-mA } I_{OH}$, $64\text{-mA } I_{OL}$)
- Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors
- Package Options Include Plastic 300-mil Shrink Small-Outline (DL) and Thin Shrink Small-Outline (DGG) Packages and 380-mil Fine-Pitch Ceramic Flat (WD) Package Using 25-mil Center-to-Center Spacings

description

The 'ABTH16460 are 4-bit to 1-bit multiplexed registered transceivers used in applications where four separate data paths must be multiplexed onto or demultiplexed from a single data path. Typical applications include multiplexing and/or demultiplexing of address and data information in microprocessor or bus-interface applications. These devices also are useful in memory-interleaving applications.

Five 4-bit I/O ports ($1A-4A$, $1B1-4$, $2B1-4$, $3B1-4$, and $4B1-4$) are available for address and/or data transfer. The output-enable ($\overline{OEB}$, $\overline{OEB1}-\overline{OEB4}$, and $\overline{OEA}$) inputs control the bus-transceiver functions. These control signals also allow 4-bit or 16-bit control, depending on the $\overline{OEB}$ level.

SN54ABTH16460 . . . WD PACKAGE
SN74ABTH16460 . . . DGG OR DL PACKAGE
(TOP VIEW)

LEAB1	1	56	$\overline{OEB1}$
LEAB2	2	55	$\overline{OEB2}$
LEBA	3	54	SEL0
GND	4	53	GND
LEB1	5	52	1B1
LEB2	6	51	1B2
V_{CC}	7	50	V_{CC}
CLKBA	8	49	1B3
$\overline{OEB}$	9	48	1B4
CLKAB	10	47	2B1
GND	11	46	GND
1A	12	45	2B2
2A	13	44	2B3
CE_SEL0	14	43	2B4
CE_SEL1	15	42	3B1
3A	16	41	3B2
4A	17	40	3B3
GND	18	39	GND
CLKENAB	19	38	3B4
CLKENB	20	37	4B1
CLKENBA	21	36	4B2
V_{CC}	22	35	V_{CC}
LEB3	23	34	4B3
LEB4	24	33	4B4
GND	25	32	GND
$\overline{OEA}$	26	31	SEL1
LEAB3	27	30	$\overline{OEB3}$
LEAB4	28	29	$\overline{OEB4}$



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus and EPIC-II B are trademarks of Texas Instruments Incorporated.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1997, Texas Instruments Incorporated

SN54ABTH16460, SN74ABTH16460

4-TO-1 MULTIPLEXED/DEMULTIPLEXED TRANSCEIVERS

WITH 3-STATE OUTPUTS

SCBS207F – OCTOBER 1992 – REVISED MAY 1997

description (continued)

Address and/or data information can be stored using the internal storage latches/flip-flops. The latch-enable (LEB1–LEB4, LEBA, and LEAB1–LEAB4) and clock/clock-enable (CLK/CLKEN) inputs are used to control data storage. When either one of the latch-enable inputs is high, the latch is transparent (clock is a don't care as long as the latch enable is high). When the latch-enable input goes low (providing that the clock does not transit from low to high), the data present at the inputs is latched and remains latched until the latch-enable input is returned high. When the clock enable is low and the corresponding latch enable is low, data can be clocked on the low-to-high transition of the clock. When either the clock enable or the corresponding latch enable is high, the clock is a don't care.

Four select pins (SEL0, SEL1, CE_SEL0, and CE_SEL1) are provided to multiplex data (A port), or to select one of four clock enables (B port). This allows the user the flexibility of controlling one bit at a time.

Active bus-hold circuitry is provided to hold unused or floating data inputs at a valid logic level.

When V_{CC} is between 0 and 2.1 V, the device is in the high-impedance state during power up or power down. However, to ensure the high-impedance state above 2.1 V, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

The SN54ABTH16460 is characterized for operation over the full military temperature range of -55°C to 125°C . The SN74ABTH16460 is characterized for operation from -40°C to 85°C .

Function Tables

A-TO-B OUTPUT ENABLE[†]

INPUTS		OUTPUT Bn
$\overline{OEB}$	$\overline{OEBn}$	
H	H	Z
H	L	Z
L	H	Z
L	L	Active

[†] n = 1, 2, 3, 4

A-TO-B STORAGE
(assuming $\overline{OEB} = \text{L}$, $\overline{OEBn} = \text{L}$)[‡]

INPUTS								OUTPUTS			
CLKENAB	CE_SEL1	CE_SEL0	CLKAB	LEAB1	LEAB2	LEAB3	LEAB4	B1	B2	B3	B4
X	X	X	H or L	H	L	L	L	A	A ₀	A ₀	A ₀
X	X	X	H or L	H	H	H	L	A	A	A	A ₀
L	X	X	L	L	L	L	L	A ₀	A ₀	A ₀	A ₀
L	L	L	↑	L	L	L	L	A	A ₀	A ₀	A ₀
L	L	H	↑	L	L	L	L	A ₀	A	A ₀	A ₀
L	H	L	↑	L	L	L	L	A ₀	A ₀	A	A ₀
L	H	H	↑	L	L	L	L	A ₀	A ₀	A ₀	A
H	X	X	↑	L	L	L	L	A ₀	A ₀	A ₀	A ₀

[‡] This table does not cover all the latch-enable cases since they have similar results.



SN54ABTH16460, SN74ABTH16460
4-TO-1 MULTIPLEXED/DEMULTIPLEXED TRANSCEIVERS
WITH 3-STATE OUTPUTS

SCBS207F – OCTOBER 1992 – REVISED MAY 1997

Function Tables (Continued)

B-TO-A STORAGE
(before point P)

INPUTS								P
$\overline{\text{CLKENB}}$	CLKBA	LEB1	LEB2	LEB3	LEB4	SEL1	SEL0	
X	X	H	L	L	L	L	L	B1
X	X	L	H	L	L	L	H	B2
X	X	L	L	H	L	H	L	B3
X	X	L	L	L	H	H	H	B4
L						L	L	B1
						L	H	B2
						H	L	B3
						H	H	B4
L						L	L	B1 [†]
						L	H	B2 [†]
						H	L	B3 [†]
						H	H	B4 [†]

† Output level before the indicated steady-state input conditions were established

B-TO-A STORAGE
(after point P)

INPUTS					OUTPUT A
$\overline{\text{CLKENBA}}$	CLKBA	LEBA	$\overline{\text{OE\overline{A}}}$	B	
X	X	X	H	X	Z
X	X	H	L	L	L
X	X	H	L	H	H
H	X	L	L	X	A ₀ [†]
L	↑	L	L	L	L
L	↑	L	L	H	H
L	L	L	L	X	A ₀ [†]

† Output level before the indicated steady-state input conditions were established


SN54ABTH16460, SN74ABTH16460

4-TO-1 MULTIPLEXED/DEMULTIPLEXED TRANSCEIVERS

WITH 3-STATE OUTPUTS

SCBS207F – OCTOBER 1992 – REVISED MAY 1997

logic diagram (positive logic)

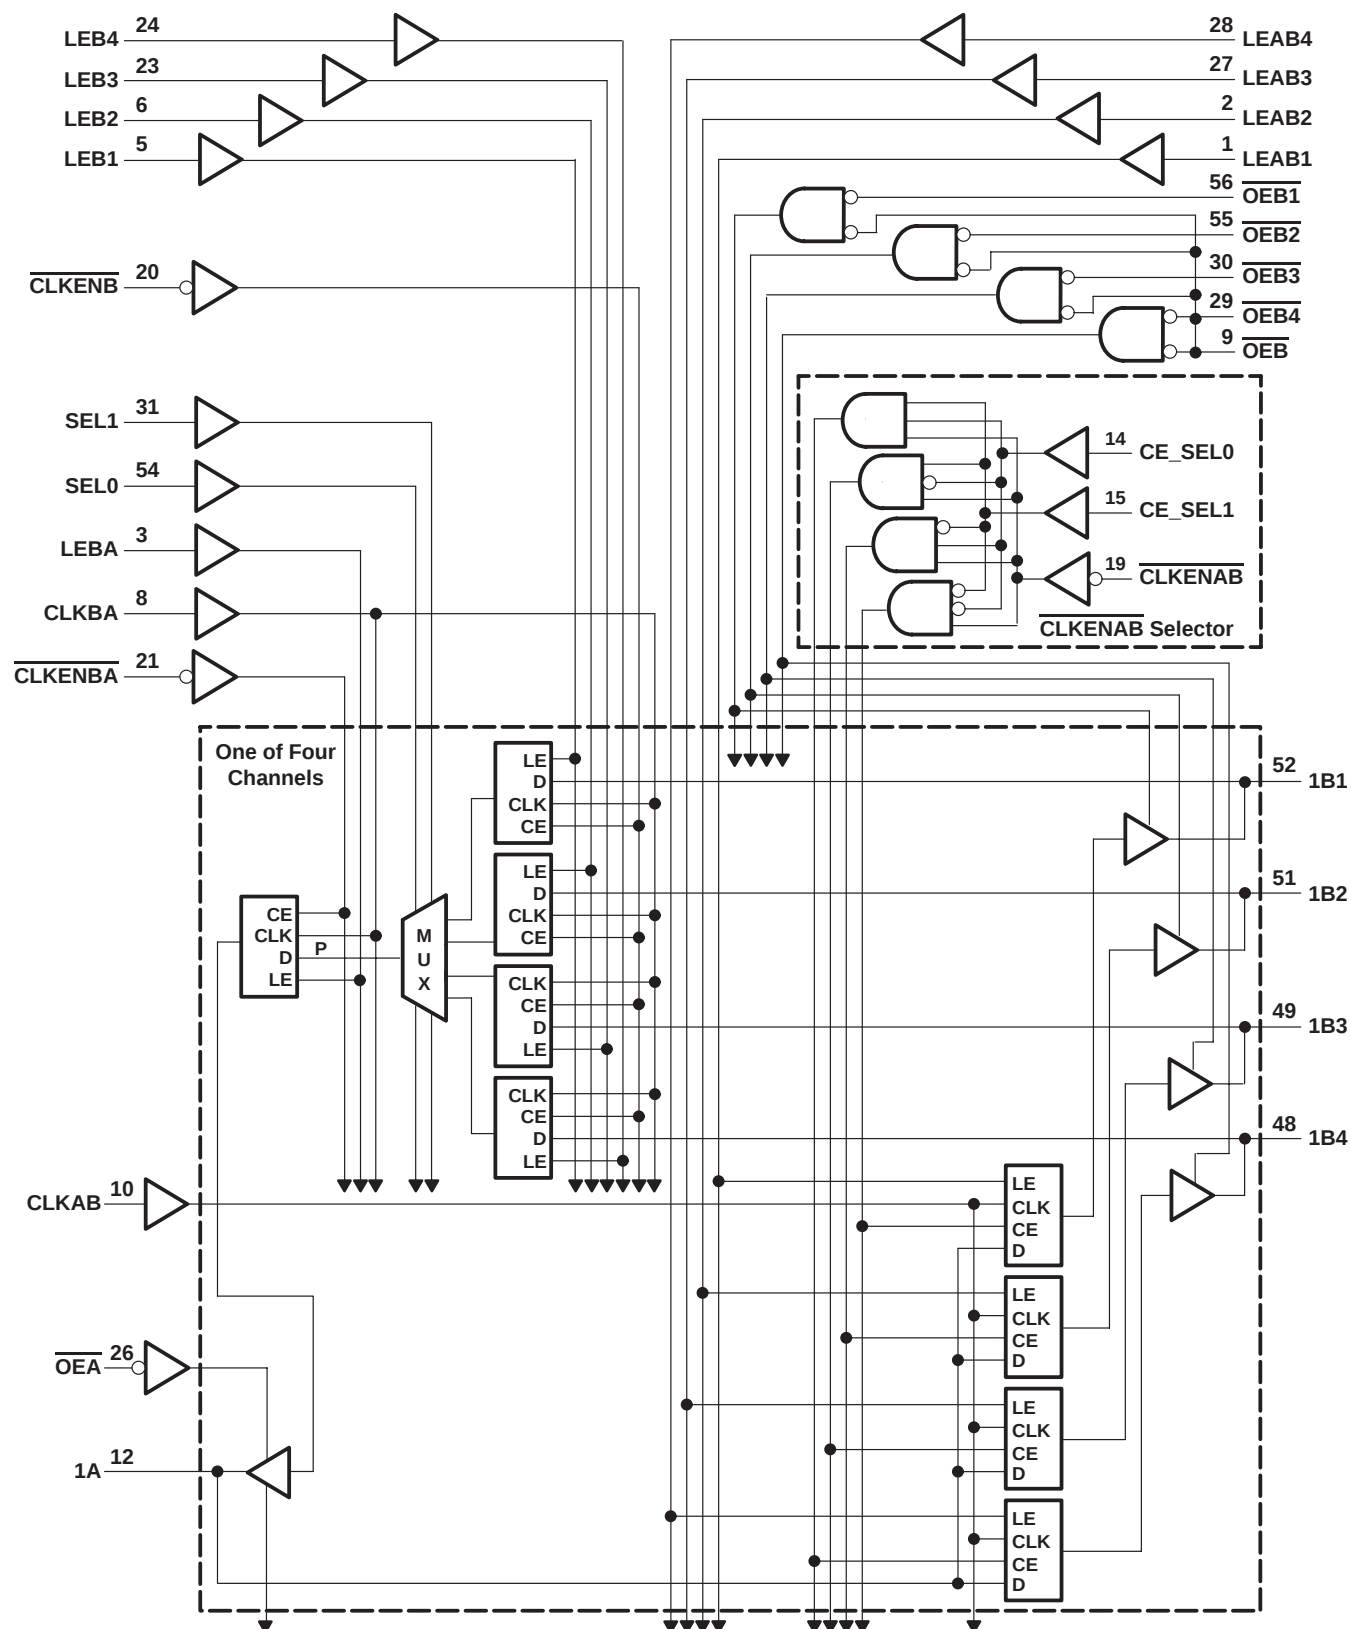

SN54ABTH16460, SN74ABTH16460 4-TO-1 MULTIPLEXED/DEMULTIPLEXED TRANSCEIVERS WITH 3-STATE OUTPUTS

SCBS207F – OCTOBER 1992 – REVISED MAY 1997

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V_{CC}	–0.5 V to 7 V
Input voltage range, V_I (except I/O ports) (see Note 1)	–0.5 V to 7 V
Voltage range applied to any output in the high or power-off state, V_O	–0.5 V to 5.5 V
Current into any output in the low state, I_O : SN54ABTH16460	96 mA
SN74ABTH16460	128 mA
Input clamp current, I_{IK} ($V_I < 0$)	–18 mA
Output clamp current, I_{OK} ($V_O < 0$)	–50 mA
Package thermal impedance, θ_{JA} (see Note 2): DGG package	81°C/W
DL package	74°C/W
Storage temperature range, T_{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
2. The package thermal impedance is calculated in accordance with EIA/JEDEC Std JESD51.

recommended operating conditions (see Note 3)

			SN54ABTH16460		SN74ABTH16460		UNIT
			MIN	MAX	MIN	MAX	
V_{CC}	Supply voltage		4.5	5.5	4.5	5.5	V
V_{IH}	High-level input voltage		2		2		V
V_{IL}	Low-level input voltage			0.8		0.8	V
V_I	Input voltage		0	V_{CC}	0	V_{CC}	V
I_{OH}	High-level output current			–24		–32	mA
I_{OL}	Low-level output current			48		64	mA
$\Delta t/\Delta v$	Input transition rise or fall rate	Outputs enabled		10		10	ns/V
$\Delta t/\Delta V_{CC}$	Power-up ramp rate		200		200		μs/V
T_A	Operating free-air temperature		–55	125	–40	85	°C

NOTE 3: Unused control pins must be held high or low to prevent them from floating.

SN54ABTH16460, SN74ABTH16460
4-TO-1 MULTIPLEXED/DEMULTIPLEXED TRANSCEIVERS
WITH 3-STATE OUTPUTS

SCBS207F – OCTOBER 1992 – REVISED MAY 1997

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A = 25°C			SN54ABTH16460		SN74ABTH16460		UNIT
			MIN	TYP†	MAX	MIN	MAX	MIN	MAX	
V _{IK}		V _{CC} = 4.5 V, I _I = –18 mA			–1.2		–1.2		–1.2	V
V _{OH}		V _{CC} = 4.5 V, I _{OH} = –3 mA	2.5			2.5		2.5		V
		V _{CC} = 5 V, I _{OH} = –3 mA	3			3		3		
		V _{CC} = 4.5 V								
V _{OL}		V _{CC} = 4.5 V								V
V _{hys}				100						mV
I _I	Control inputs	V _{CC} = 0 to 5.5 V, V _I = V _{CC} or GND			±1		±1		±1	µA
	A or B ports	V _{CC} = 2.1 V to 5.5 V, V _I = V _{CC} or GND			±20		±20		±20	
I _I (hold)	A or B ports	V _{CC} = 4.5 V								µA
I _{OZPU} ‡		V _{CC} = 0 to 2.1 V, V _O = 0.5 V to 2.7 V, $\overline{OE} = X$			±50		±50		±50	µA
I _{OZPD} ‡		V _{CC} = 2.1 V to 0, V _O = 0.5 V to 2.7 V, $\overline{OE} = X$			±50		±50		±50	µA
I _{off}		V _{CC} = 0, V _I or V _O ≤ 4.5 V			±100				±100	µA
I _{CEX}		V _{CC} = 5.5 V, V _O = 5.5 V			50		50		50	µA
I _O §		V _{CC} = 5.5 V, V _O = 2.5 V	–50	–100	–200	–50	–200	–50	–200	mA
I _{CC}		V _{CC} = 5.5 V, I _O = 0, V _I = V _{CC} or GND								mA
ΔI _{CC} ¶		V _{CC} = 5.5 V, One input at 3.4 V, Other inputs at V _{CC} or GND			1.5		1.5		1.5	mA
C _i	Control inputs	V _I = 2.5 V or 0.5 V			8					pF
C _{io}	A or B ports	V _O = 2.5 V or 0.5 V			3.5					pF

* On products compliant to MIL-PRF-38535, this parameter does not apply.

† All typical values are at V_{CC} = 5 V.

‡ This parameter is characterized but not production tested.

§ Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

¶ This is the increase in supply current for each input that is at the specified TTL voltage level rather than V_{CC} or GND.

SN54ABTH16460, SN74ABTH16460
4-TO-1 MULTIPLEXED/DEMULTIPLEXED TRANSCEIVERS
WITH 3-STATE OUTPUTS

SCBS207F – OCTOBER 1992 – REVISED MAY 1997

timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

			SN54ABTH16460		SN74ABTH16460		UNIT
			MIN	MAX	MIN	MAX	
f_{clock}	Clock frequency		0	160	0	160	MHz
t_w	Pulse duration	CLKAB high or low	3.8		3.8		ns
		CLKBA high or low	4.5		4.5		
		LEAB1, 2, 3, or 4 high	2.2		2.2		
		LEBA high	2.1		2.1		
		LEB1, 2, 3, or 4 high	2.4		2.4		
t_{su}	Setup time	Before CLKAB $\uparrow$	A bus	2.5	2.5		ns
			CE_SEL0/1	3.2	3.2		
			CLKENAB	3.2	3.2		
		Before LEAB1, 2, 3, or 4 $\downarrow$	A bus	3.6	3.6		
			B bus	3.8	3.8		
			CLKENB	2.3	2.3		
		Before CLKBA $\uparrow$	CLKENBA	2.5	2.5		
			LEB1, 2, 3, or 4	4.3	4.3		
			SEL0/1	4.5	4.5		
		Before LEB1, 2, 3, or 4 $\downarrow$	B bus	3.2	3.2		
			B bus	4	4		
			LEB1, 2, 3, or 4	4.4	4.4		
t_h	Hold time	After CLKAB $\uparrow$	A bus	0.5	0.5		ns
			CE_SEL0/1	1.1	1.1		
			CLKENAB	0.5	0.5		
		After LEAB1, 2, 3, or 4 $\downarrow$	A bus	1.2	1.2		
			B bus	1.3	1.3		
			CLKENB	1	1		
		After CLKBA $\uparrow$	CLKENBA	1	1		
			SEL0/1	0	0		
		After LEB1, 2, 3, or 4 $\downarrow$	B bus	1.5	1.5		
			B bus	0.4	0.4		
			SEL0/1	0.1	0.1		

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN54ABTH16460, SN74ABTH16460

4-TO-1 MULTIPLEXED/DEMULTIPLEXED TRANSCEIVERS

WITH 3-STATE OUTPUTS

SCBS207F – OCTOBER 1992 – REVISED MAY 1997

switching characteristics over recommended ranges of supply voltage and operating free-air temperature, $C_L = 50$ pF (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$			SN54ABTH16460		SN74ABTH16460		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
$f_{\max}$			160			160		160		MHz
t_{PLH}	B	A	2.5	3.6	5.9	2.5	7.1	2.5	6.5	ns
t_{PHL}			2	3.5	5.8	2	6.8	2	6.5	
t_{PZH}	$\overline{\text{OEA}}$	A	1.5	2.8	4.8	1.5	5.9	1.5	5.6	ns
t_{PZL}			1.5	2.6	4.6	1.5	5.5	1.5	5.2	
t_{PHZ}	$\overline{\text{OEA}}$	A	2.5	3.8	5.3	2.5	6	2.5	5.9	ns
t_{PLZ}			1.5	4.6	6.1	1.5	7	1.5	6.5	
t_{PLH}	A	B	2	3.2	5.2	2	6.2	2	5.7	ns
t_{PHL}			1.5	3.1	5.2	1.5	6.1	1.5	5.7	
t_{PZH}	$\overline{\text{OEB}}$	B	1.5	3.3	5.7	1.5	6.7	1.5	6.4	ns
t_{PZL}			1.5	3.2	5.5	1.5	6.6	1.5	6.3	
t_{PHZ}	$\overline{\text{OEB}}$	B	3	4.7	6.3	3	7.1	3	7	ns
t_{PLZ}			2	4	5.5	2	6.6	2	6.1	
t_{PZH}	$\overline{\text{OEB1}}, \overline{2}, \overline{3}, \overline{4}$	B	1.5	3	5.2	1.5	6	1.5	5.8	ns
t_{PZL}			1.5	2.9	4.9	1.5	5.9	1.5	5.6	
t_{PHZ}	$\overline{\text{OEB1}}, \overline{2}, \overline{3}, \overline{4}$	B	2.5	4	5.7	2.5	6.2	2.5	6.1	ns
t_{PLZ}			1.5	3.5	4.8	1.5	5.8	1.5	5.3	
t_{PLH}	CLKBA	A	1.5	4.2	6.7	1.5	8.1	1.5	7.4	ns
t_{PHL}			1.5	4.4	6.9	1.5	8.4	1.5	7.7	
t_{PLH}	CLKAB	B	2	3.4	5.6	2	6.8	2	6.2	ns
t_{PHL}			2	3.4	5.3	2	6.3	2	5.9	
t_{PLH}	LEBA	A	2	3	5	2	6.1	2	5.6	ns
t_{PHL}			2	3.1	4.8	2	5.8	2	5.3	
t_{PLH}	LEAB1, 2, 3, 4	B	2	3.2	5.2	2	6.3	2	5.8	ns
t_{PHL}			2	3.3	5	2	6.1	2	5.6	
t_{PLH}	LEBA1, 2, 3, 4	A	2.5	4	6.5	2.5	7.8	2.5	7.2	ns
t_{PHL}			2.5	4	6.1	2.5	7.5	2.5	6.8	
t_{PLH}	SEL	A	2	4.1	6.7	2	8.1	2	7.5	ns
t_{PHL}			2	3.8	6.2	2	7.3	2	6.9	

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


SN54ABTH16460, SN74ABTH16460 4-TO-1 MULTIPLEXED/DEMULTIPLEXED TRANSCEIVERS WITH 3-STATE OUTPUTS

SCBS207F – OCTOBER 1992 – REVISED MAY 1997


PARAMETER MEASUREMENT INFORMATION

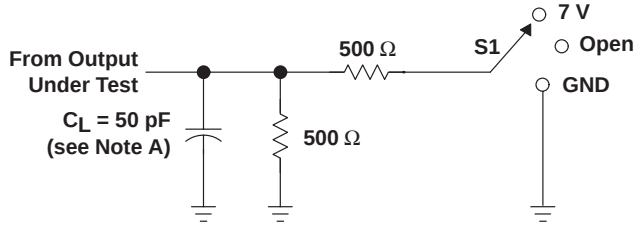


LOAD CIRCUIT

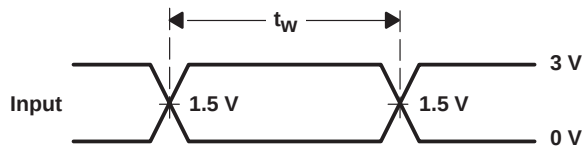


VOLTAGE WAVEFORMS
PULSE DURATION

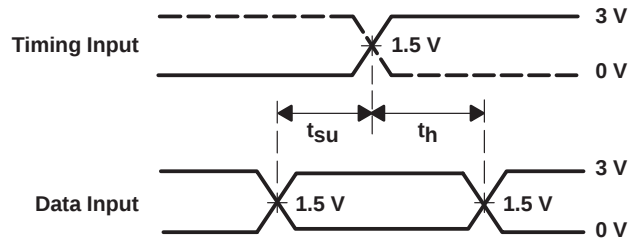

VOLTAGE WAVEFORMS
SETUP AND HOLD TIMES

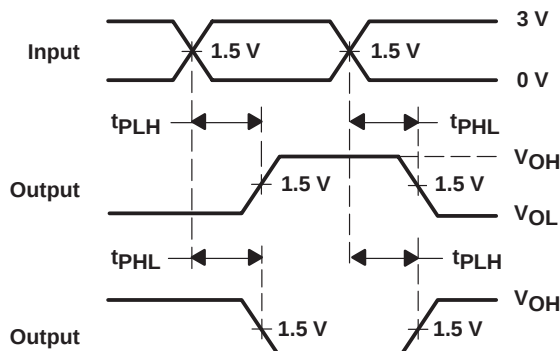

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES
INVERTING AND NONINVERTING OUTPUTS

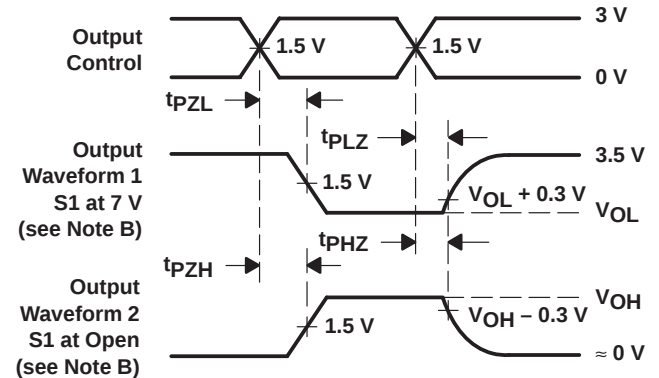


VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES
LOW- AND HIGH-LEVEL ENABLING

- NOTES: A. C_L includes probe and jig capacitance.
B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r \leq 2.5 \text{ ns}$, $t_f \leq 2.5 \text{ ns}$.
D. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

TAPE AND REEL INFORMATION

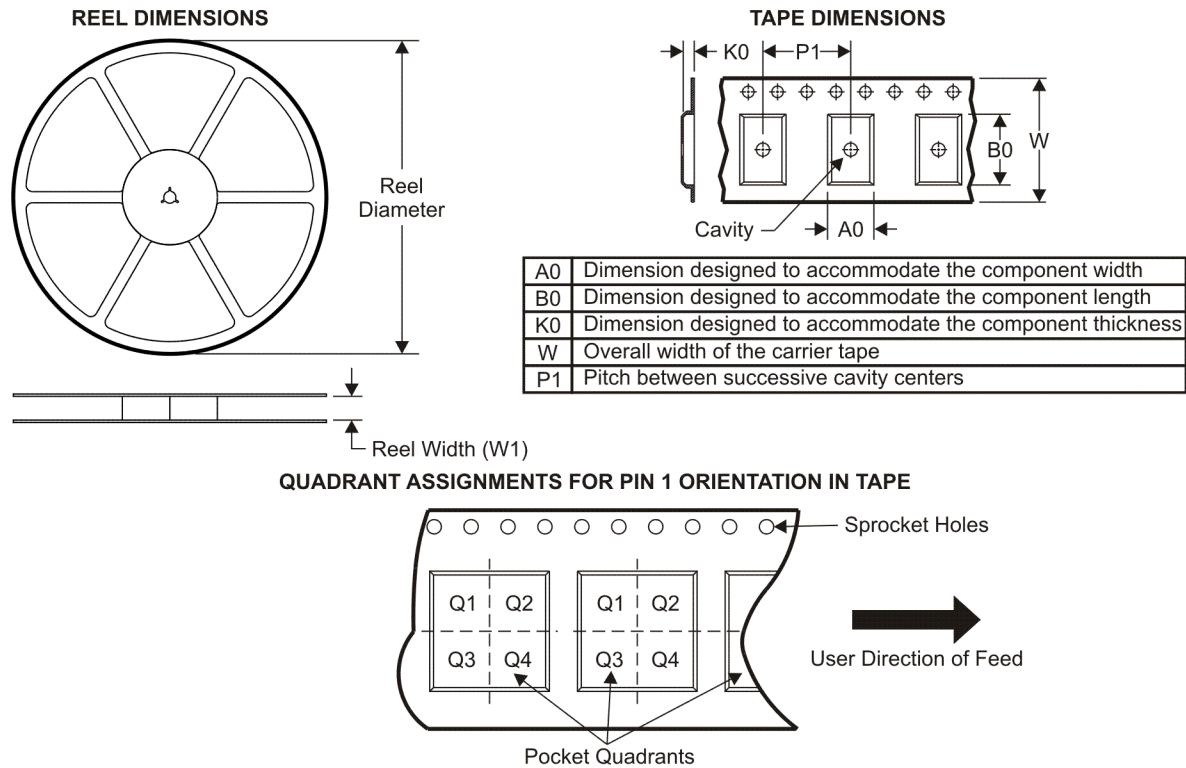

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ABTH16460DGGR	TSSOP	DGG	56	2000	330.0	24.4	8.6	15.6	1.8	12.0	24.0	Q1
SN74ABTH16460DLR	SSOP	DL	56	1000	330.0	32.4	11.35	18.67	3.1	16.0	32.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ABTH16460DGGR	TSSOP	DGG	56	2000	346.0	346.0	41.0
SN74ABTH16460DLR	SSOP	DL	56	1000	346.0	346.0	49.0

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated